


TECHNICAL DATA	
O.RING	EPDM-NBR
SLIPPER	PTFE+CARBON FIBER
NOZZLES POSITIONS	2-4
NOZZLES CIRCLE	ON REQUEST
NOZZLES SIZE	1/4"NPT
MAX FLOW	200 L/min
MAX PRESSURE	200 bar
MAX TEMPERATURE	90 °C
MATERIAL	INOX AISI 316
DIFFUSER OPENING	3/6/9/12
WEIGHT	7.1 KG

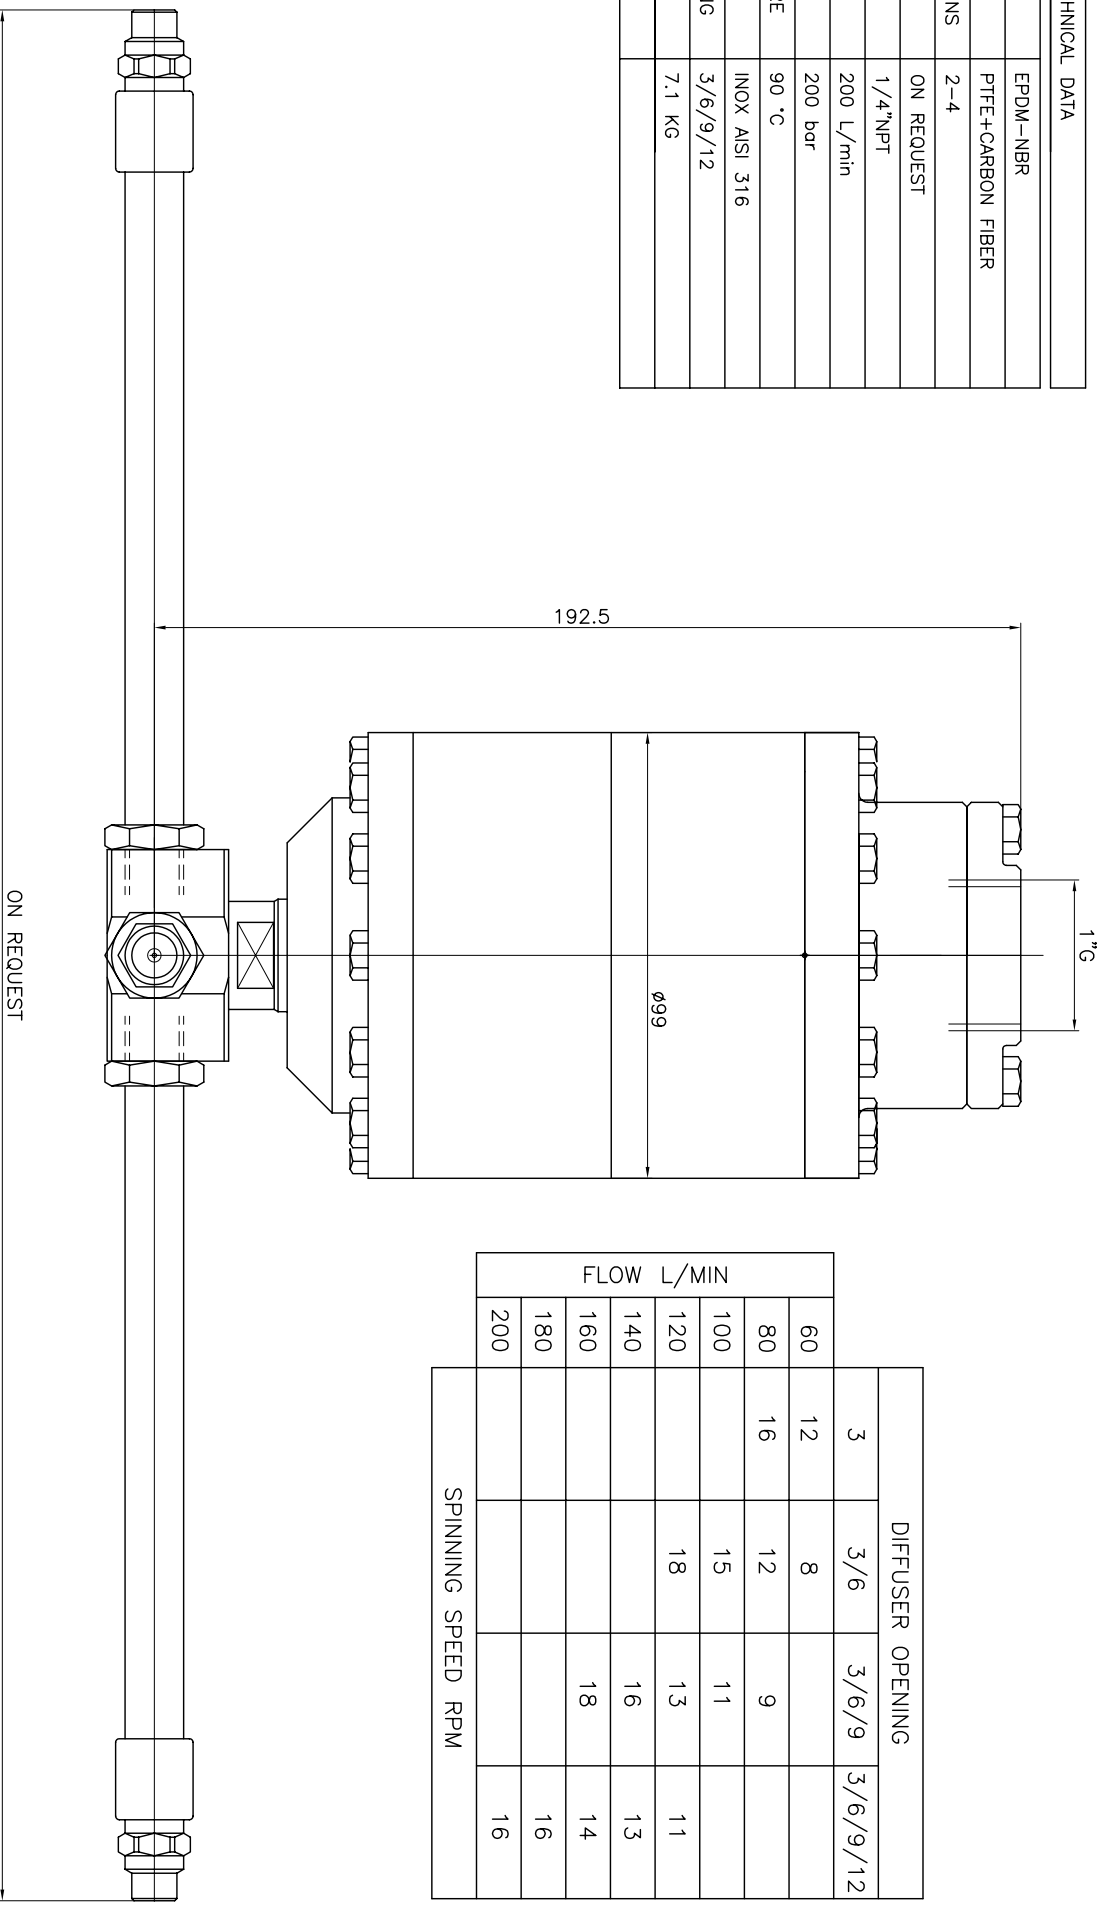

FLOW L/MIN	DIFFUSER OPENING			
	3	3/6	3/6/9	3/6/9/12
60	12	8		
80	16	12	9	
100		15	11	
120		18	13	11
140			16	13
160			18	14
180				16
200				16

SPINNING SPEED RPM

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5
FOGLIO	FOGLIO	xxxx				
DATA	DATA	xx-xx-xx				
GREZZO	TOLLERANZE GENERALI classe m UNI-EN 22768/1					
	0-6	6-30	30-120	120-400	400-1000	1000-2000
SGROSS.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2
Δ	NOTE: VERSION .05					
FINITURA	MATERIALE: STAINLESS STEEL					
RETTIFICA	DESCRIZIONE: APPLICATION DRAWING					
COMP.:	PW 200-SL					
SCALE	1:1					
MOD.	A3 0					



DESIGN: CRT
CONTR.: DM
DATA: 26.07.05