
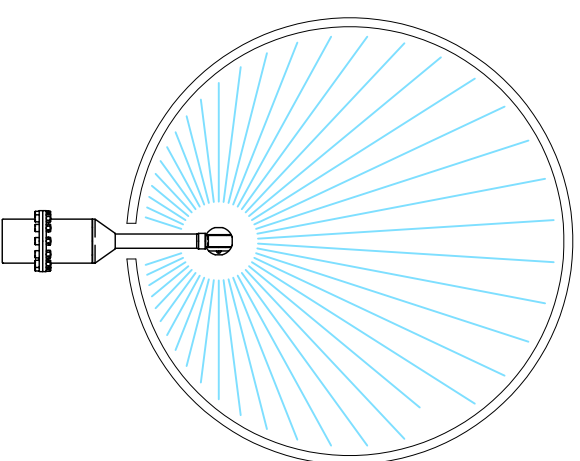


TECHNICAL DATA

O.RING	EPDM
SLIPPER	PTFE+CARBON FIBRE
FILTER	NONE
NOZZLES POSITIONS	2 OR 4
NOZZLES TYPE	SPECIAL NOZZLE XB 030
MAX OPERATING FLOW	30 L/min – 8 USG/min
MAX OPERATING PRESSURE	150 bar – 2100 psi
MAX OPERATING TEMPERATURE	90 °C – 194°F
MATERIAL	INOX AISI 316
LUBRICANTS	NONE
CONICAL GEARS	FIXED Z=23 ROTATING Z=25
MODULE	1
COMPLETE CYCLE	25 ROTATIONS
COMPLETE CYCLE TIME	1.1 MIN.
ROTATION SPEED	24 RPM
WEIGHT	4.6 KG – 10 LBS

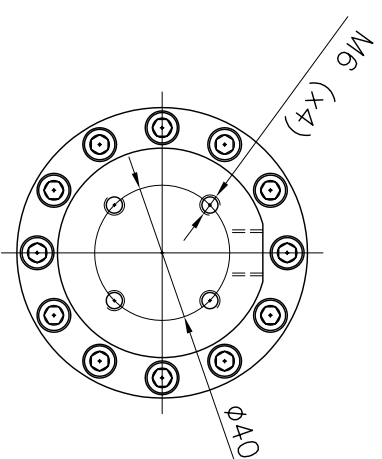

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5
GREZZO	FOGLIO	XXXX				
SGROSS. 3.2/	DATA	XX.XX.XX				
▽ = 3.2/	TOLLERANZE GENERALI classe m UNI-EN 22768/1					
▽▽ = 1.6/	0 ÷ 6 6 ÷ 30 30 ÷ 120 120 ÷ 400 400 ÷ 1000 1000 ÷ 2000					
▽▽▽ = 0.8/	± 0.1 ± 0.2 ± 0.3 ± 0.5 ± 0.8 ± 1.2					
FINITURA	NOTE:					
RETTIFICA	DESCRIZIONE: APPLICATION DRAWING					
	XB 031AAE_BQ.01					
	CODICE:		XB 031AAE_BQ.01			
	SCALA		1:2			
	DATA: 27.08.08		A4			
	DISIGN.: CR		O			
	CONTR.: DM		MOD.			
	MONTECCHIO E. (RE) - ITALY		CLEANING HEADS			
	Bonomi					