FLOW L/MIN	DIFFUSER OPENING			
	3	3/6	3/6/9	3/6/9/12
60	12	8		
80	16	12	9	
100		15	11	
120		18	13	11
140			16	13
160			18	14
180				16
200				16
SPINNING SPEED RPM				

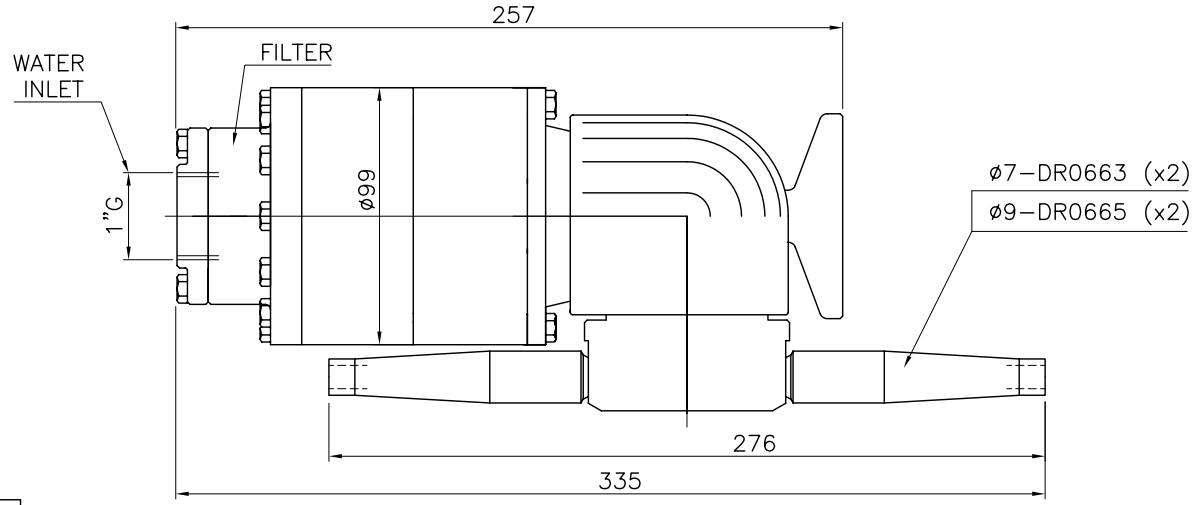

TECHNICAL DATA	
O.RING	NBR – EPDM – VITON
SLIPPER	PTFE+CARBON FIBRE
BUSHING	AISI 316
FILTER	700 MICRON
NOZZLES POSITIONS	2
NOZZLES THREAD	3/8"G
TESTING NOZZLES	2 x 0000
OPERATING FLOW RANGE	60 – 200 L/min
TESTING FLOW	000 L/min
OPERATING PRESSURE RANGE	5 – 30 bar
TESTING PRESSURE	00 bar
CENTER LINE MIN PASS THROUGH HOLE	310 mm
MANUAL MIN PASS THROUGH HOLE	278 mm
MAX OPERATING TEMPERATURE	90 °C
MATERIAL	INOX AISI 316
CONICAL GEARS	FIXED Z=59 ROTATING Z=61
MODULE	1
DIFFUSER SPEED SETTING OPENINGS	4
ROTATION SPEED	SEE CHART
FULL CYCLE	61 ROTATIONS
FULL CYCLE TIME	3.8 min AT 16 RPM
WEIGHT	9.6 KG

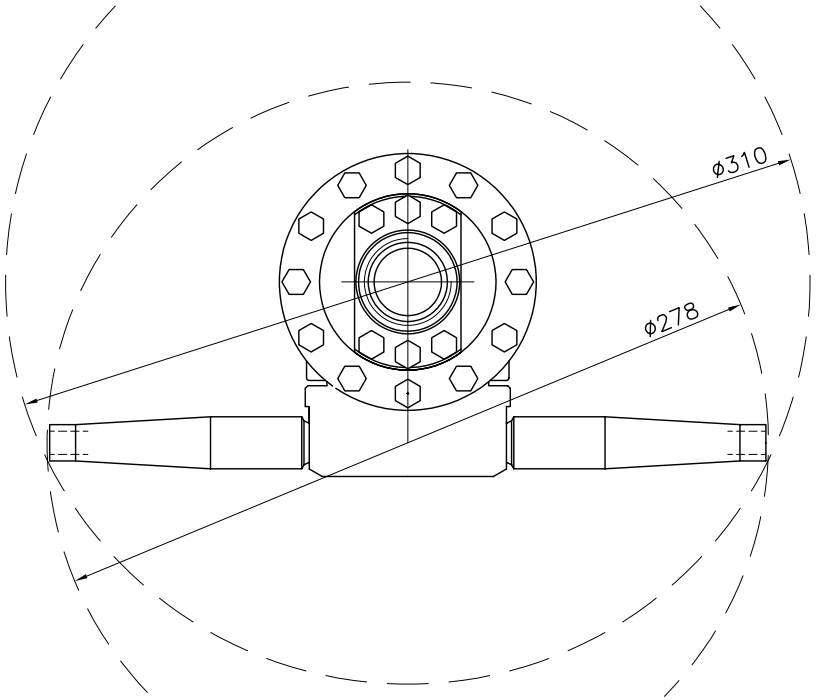

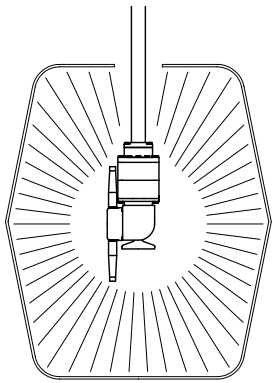

RUGOSITA' (UNI 4600)
GREZZO ~ = ∅
SGROSS. ▽ = 3.2/
FINITURA ▽▽ = 1.6/
RETTIFICA ▽▽▽ = 0.8/

MODIFICA	1	2	3	4	5
FOGLIO	XXXX				
DATA	XX.XX.XX				

TOLLERANZE GENERALI classe m UNI–EN 22768/1

0÷6	6÷30	30÷120	120÷400	400÷1000	1000÷2000
±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

NOTE:

DESCRIZIONE: RW 220 A
APPLICATION DRAWING

Bakondi
CLEANING HEADS
MONTECCHIO E. (RE) – ITALY

DISEGN.: CR | CONTR.: DM
DATA: 06.10.08 | MOD.
SCALA 1:3 | A3 | 0
CODICE: RW 220 A