


TECHNICAL DATA

O-RING	NBR-EPDM-VITON
SLIPPER	PTFE+CARBON FIBER
BUSHING	AISI 316
NOZZLES POSITIONS	2 - 4
NOZZLES SIZE	SPECIAL 1/8"G
OPERATING FLOW	MAX 60 L/min
OPERATING PRESSURE	MAX 500 bar
MAX TEMPERATURE	90 °C
MATERIAL	INOX AISI 316
GEARS	FIXED Z=29 ROTATING Z=31
MODULE	1
FULL CYCLE	31 ROTATIONS
FULL CYCLE TIME	1.00 MIN. AT 3 BAR AIR PRESSURE
AIR MOTOR	ATLAS COPCO ATEX BA 725 INOX
AIR EXHAUST	FESTO SILENCER BP 415 ON MOTOR
WEIGHT	4.9 KG

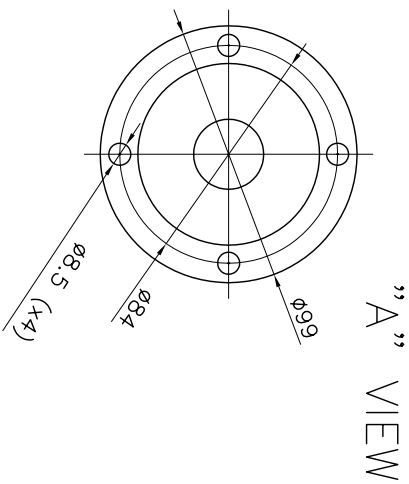

DIMENSION "L"	DIMENSION "L1"
526	953
1026	1453
1526	1953
2026	2453
2526	2953
3026	3453
3526	3953
4026	4453

AIR PRESSURE AND CONSUMPTION

ROTATION SPEED	29 RPM	1 bar	264 L/min. AIR
ROTATION SPEED	42 RPM	2 bar	288 L/min. AIR
ROTATION SPEED	51 RPM	3 bar	300 L/min. AIR
ROTATION SPEED	58 RPM	4 bar	306 L/min. AIR
ROTATION SPEED	62 RPM	5 bar	312 L/min. AIR
ROTATION SPEED	66 RPM	6 bar	324 L/min. AIR

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5
FOGLIO	DATA	XXXX				
GREZZO	TOLLERANZE GENERALI classe m	UNI-EN 22768/1				
~ = 0.1	0-6	6-30	30-120	120-400	400-1000	1000-2000
SGROSS. ~ = 0.2	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2
▽ = 3.2	NOTE:					
FINITURA 1.6	MATERIALE:					
▽▽ = 1.6	DESCRIZIONE: APPLICATION DRAWING					
RETIFICA 0.8	XC 561 P cm					
▽▽▽ = 0.8	CODICE: XC 561 P cm					

