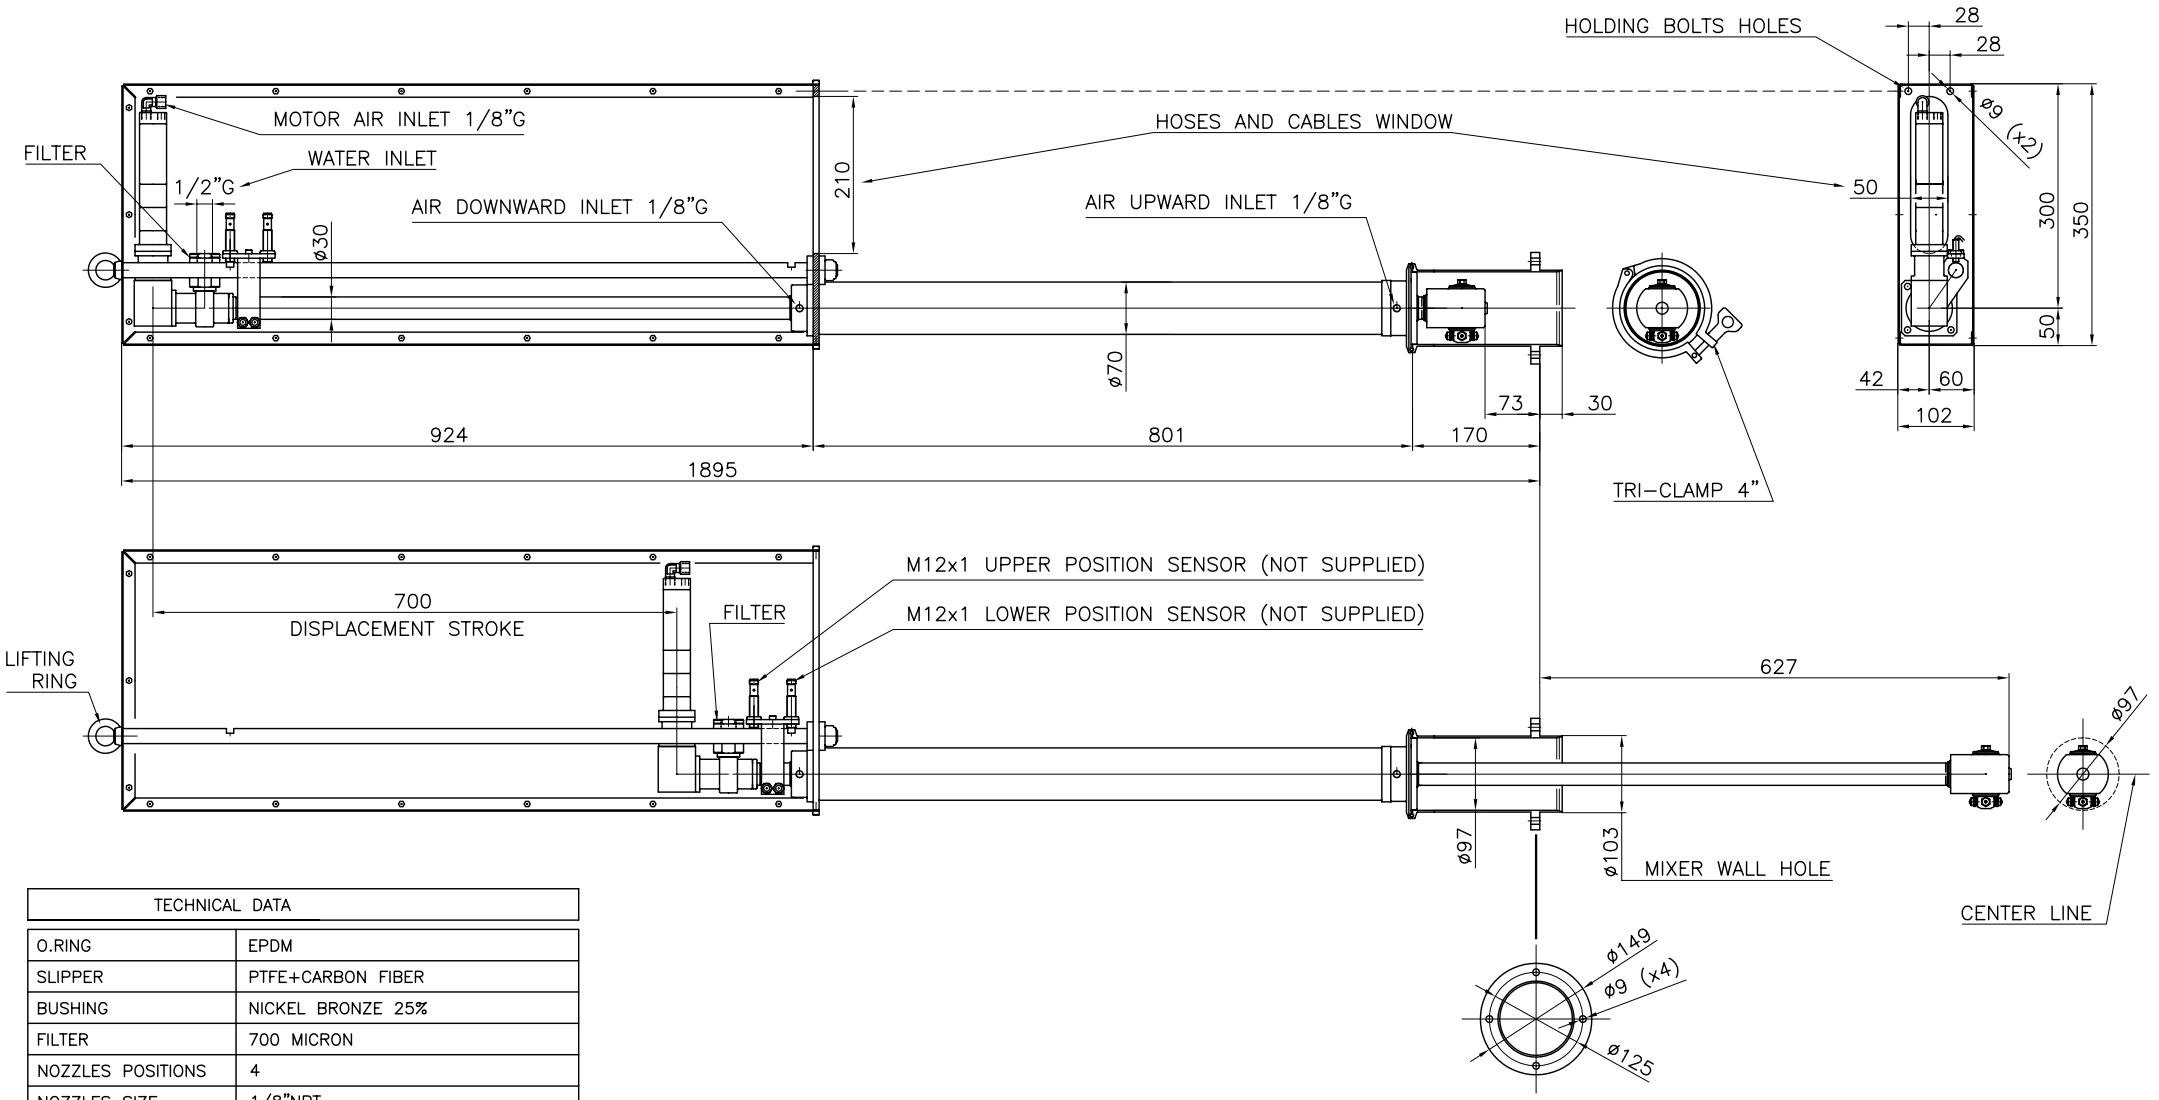

TECHNICAL DATA	
O.RING	EPDM
SLIPPER	PTFE+CARBON FIBER
BUSHING	NICKEL BRONZE 25%
FILTER	700 MICRON
NOZZLES POSITIONS	4
NOZZLES SIZE	1/8"NPT
OPERATNG FLOW	60 L/min
OPERATING PRESSURE	150 bar
MAX TEMPERATURE	90 °C
MATERIAL	INOX AISI 316
GEARS	FIXED Z=29 ROTATING Z=31
MODULE	1
FULL CYCLE	31 ROTATIONS
FULL CYCLE TIME	1.00 MIN. AT 3 BAR AIR PRESSURE
AIR MOTOR	ATLAS COPCO BA 720 INOX
AIR EXAUST	FESTO SILENCER BP 415 ON MOTOR
WEIGHT	6.5 KG

AIR PRESSURE AND CONSUMPTION			
ROTATION SPEED	29 RPM	1 bar	264 L/min. AIR
ROTATION SPEED	42 RPM	2 bar	288 L/min. AIR
ROTATION SPEED	51 RPM	3 bar	300 L/min. AIR
ROTATION SPEED	58 RPM	4 bar	306 L/min. AIR
ROTATION SPEED	62 RPM	5 bar	312 L/min. AIR
ROTATION SPEED	66 RPM	6 bar	324 L/min. AIR

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5
GREZZO ~ = ▽	FOGLIO	XXXX				
SGROSS. ▽ = ▽3.2	DATA	XX.XX.XX				
FINITURA ▽▽ = ▽1.6	TOLLERANZE GENERALI classe m UNI-EN 22768/1					
RETTIFICA ▽▽▽ = ▽0.8	0÷6	6÷30	30÷120	120÷400	400÷1000	1000÷2000
	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

NOTE:

DESCRIZIONE: APPLICATION DRAWING
XC 061 PDBD S3A

file: XC 061 PDBD S3A cm

Bolondi
CLEANING HEADS
MONTECCHIO E. (RE) – ITALY

DISEGN.: CR | CONTR.: DM
DATA: 26.05.08 | MOD. 0
SCALA 1:9 | A4
CODICE: XC 061PDBD S3A