



TECHNICAL DATA

O.RING	NBR
SLIPPER	PTFE+CARBON FIBER
BUSHING	AISI 316
NOZZLES POSITIONS	2
NOZZLES SIZE	HARD HOLE M8x1 + 1/8"G ADAPTER
MAX OPERATING FLOW	200 L/min
MAX OPERATING PRESSURE	500 bar
MIN PASS THROUGH HOLE	120 mm
MAX TEMPERATURE	90 °C
MATERIAL	INOX AISI 316
PITCH	0.5" PER EACH ROTATION
PITCH DISTANCE AT 0.5 m	4.3 mm
PITCH DISTANCE AT 1 m	8.7 mm
ROTATION SPEED	120 RPM
FULL CYCLE ANGLE	90°
FULL CYCLE ROTATIONS	180
FULL CYCLE TIME	1.5 MIN.
AIR MOTOR	ATLAS COPCO LZB 42
WEIGHT	18 KG

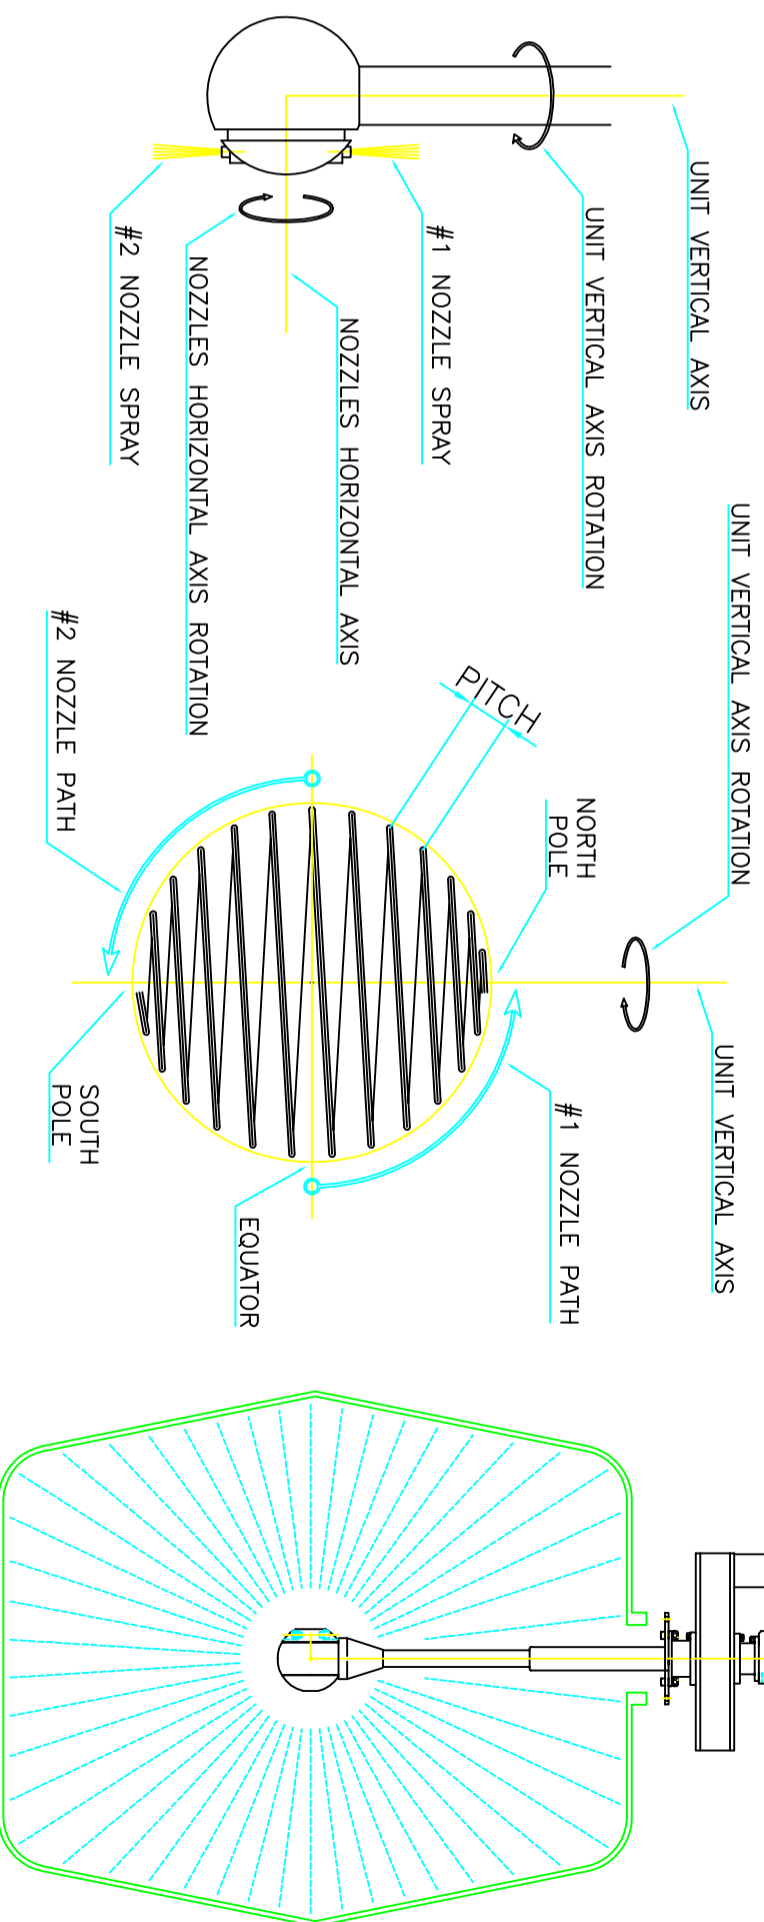

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5
FOGLIO XXXX	FOGLIO	XXXX				
GREZZO	DATA	XX-XX-XX				
TOLLERANZE GENERALI classe m UNI-EN 22768/1	0 ÷ 6	6 ÷ 30	30 ÷ 120	120 ÷ 400	400 ÷ 1000	1000 ÷ 2000
SGROSS. 3.2/	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2
NOTE:						
FINITURA 1.6/	MATERIALE:					
RETTIFICA 0.8/	DESCRIZIONE: XB 523 P					
INSTALLATION DRAWING						
DESCRIZIONE: XB 523 P	INSTALLATION DRAWING					
DESCRIZIONE: XB 523 P	INSTALLATION DRAWING					



CLEANING HEADS  
MONTECCHIO E. (RE) - ITALY

DISEGN.: CR CONTR.: DM  
DATA: 10.11.14 MOD.

SCALA 1:4 A4 O

CODICE: XB 523 P