



| TECHNICAL DATA | |
|-----------------------------------|-----------------------------------|
| O-RINGS | EPDM |
| MANIFOLD LIP SEAL | EPDM |
| BUSHING | PEEK |
| NOZZLES POSITIONS | 2 - 4 |
| NOZZLES THREAD | M12x1 |
| TESTING NOZZLES | 0 x DIA. 0.0 |
| OPERATING FLOW RANGE | 30 - 80 L/min |
| TESTING FLOW | 00 L/min |
| OPERATING PRESSURE RANGE | 3 - 10 bar |
| TESTING PRESSURE | 00 bar |
| CENTER LINE MIN PASS THROUGH HOLE | 120 mm |
| MANUAL MIN PASS THROUGH HOLE | 97 mm (4" TRI-CLAMP) |
| PIPE LENGHT | 518 mm (STANDARD) |
| MAX OPERATING TEMPERATURE | 90 °C |
| MATERIAL | INOX AISI 316 + PEEK |
| CONICAL GEARS | FIXED Z=29 ROTATING Z=31 |
| MODULE | 1 |
| FULL CYCLE | 31 ROTATIONS |
| FULL CYCLE TIME | 1.5 MIN. AT 20 RPM ROTATION SPEED |
| ROTATION SPEED | 12 TO 27 RPM |
| ROTATION DRIVE | AQUAMOTOR TURBINE |
| WEIGHT | 7.5 KG |

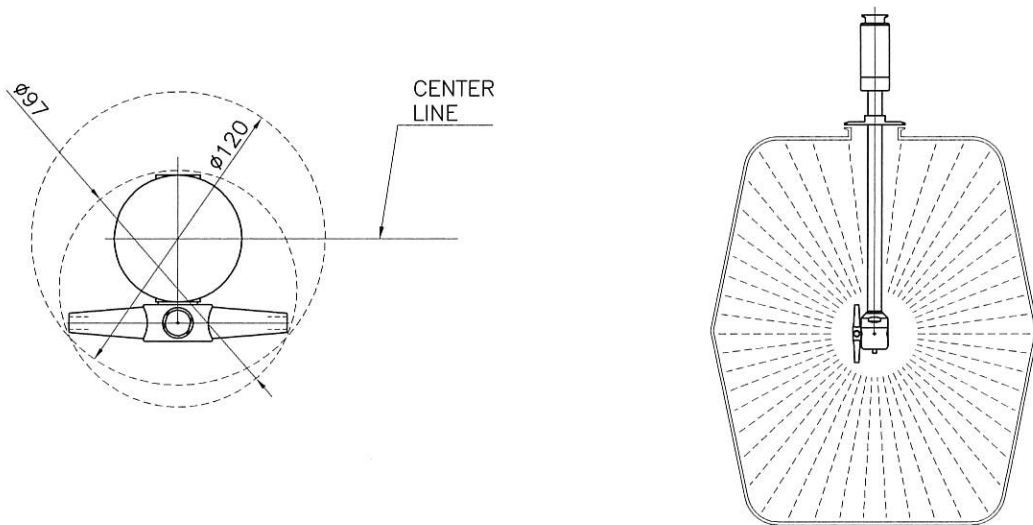

| RUGOSITA' (UNI 4600) | MODIFICA | 1 | 2 | 3 | 4 | 5 |
|---|---|------|--------|---------|----------|-----------|
| FOGLIO | XXXX | | | | | |
| DATA | XX.XX.XX | | | | | |
| GREZZO | TOLLERANZE GENERALI classe m UNI-EN 22768/1 | | | | | |
| ~ = √ | 0±6 | 6±30 | 30±120 | 120±400 | 400±1000 | 1000±2000 |
| SGROSS. | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.8 | ±1.2 |
| ∇ = 3.2/√ | NOTE: | | | | | |
| FINITURA | DESCRIZIONE: XM 060A | | | | | |
| ∇∇ = 1.6/√ | APPLICATION DRAWING | | | | | |
| RETTIFICA | | | | | | |
| ∇∇∇ = 0.8/√ | | | | | | |
|  CLEANING HEADS MONTECCHIO E. (RE) - ITALY | | | | | | |
| DISEGN.: CR CONTR.: DM | | | | | | |
| DATA: 15.09.14 MOD. | | | | | | |
| SCALA | | | | | | |
| 1:2 A3 0 | | | | | | |
| CODICE: XM 060A | | | | | | |