
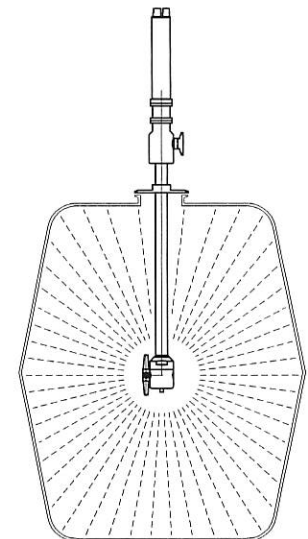



TECHNICAL DATA	
O-RINGS	EPDM
MANIFOLD LIP SEAL	EPDM
BUSHING	PEEK
NOZZLES POSITIONS	4
NOZZLES THREAD	M12x1
TESTING NOZZLES	0 x DIA. 0.0
OPERATING FLOW RANGE	0 - 80 L/min
TESTING FLOW	60 L/min
OPERATING PRESSURE RANGE	0 - 10 bar
TESTING PRESSURE	10 bar
MANUAL MIN PASS THROUGH HOLE	72 mm
MAX OPERATING TEMPERATURE	90 °C
MATERIAL	INOX AISI 316
CONICAL GEARS	FIXED Z=29 ROTATING Z=31
MODULE	1
FULL CYCLE	31 ROTATIONS
FULL CYCLE TIME	0.6 MIN. AT 3 bar AIR PRESSURE
AIR MOTOR	ATLAS COPCO BA0720 INOX
WEIGHT	7.5 KG

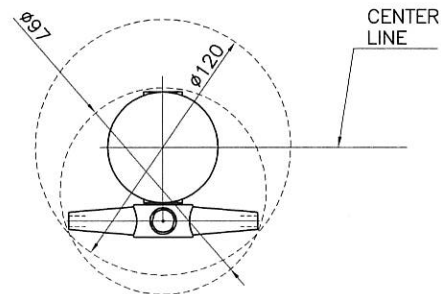

AIR PRESSURE AND CONSUMPTION			
ROTATION SPEED	51 RPM	3 bar	300 L/min. AIR
ROTATION SPEED	58 RPM	4 bar	306 L/min. AIR
ROTATION SPEED	62 RPM	5 bar	312 L/min. AIR
ROTATION SPEED	66 RPM	6 bar	324 L/min. AIR

VERSIONE	01	02	03	04	05
FOGLIO	XXXX				
DATA	30.10.15				
VERSIONE	06	07	08	09	10
FOGLIO					
DATA					
NOTE:					
DESCRIZIONE:	XM 060PPE L=1618 APPLICATION DRAWING				
 CLEANING HEADS MONTECCHIO E. (RE) - ITALY DISEGN.: CR CONTR.: DM DATA: 30.10.15 VERSIONE SCALE 1:2 A3 01 CODICE: XM 060P					